



PRODUCT INFORMATION SHEET

DYCEM LITE

Protecting uptime through floor-level contamination control.



Ready to Deploy



OpEx Ready



Static Dissipative



18 Month Lifespan

Introducing our simplest, ready-to-use, loose-laid mat.

Dycem Lite mats are the superior alternative to sticky mats. Scientifically proven to capture up to **99.9%** of shoe and wheel-borne contamination and up to **75%** of airborne contamination.

Lightweight, low-profile and easy to clean, Lite Mats deliver outstanding contamination control, in the most cost-effective way possible.



Ultra Low Profile

Smooth transition on and off the mat, with a non-slip underside for stability.



Reusable

Lightweight and edgeless design. No need for permanent installation or handling downtime.



Sustainable

Sustainable alternative, reducing the need for single-use plastics and contaminated waste.

WHY CHOOSE DYCEM LITE?



Customizable

Ability to add your logo to Dycem Lite.



Easy to Clean

Integrate into existing procedures.



Compliant


Designed to support best-practice under ISO guidelines.



COMPLIANCE




CUSTOMIZATION



Sky Grey



Scan Me For...
Cleaning Instructions

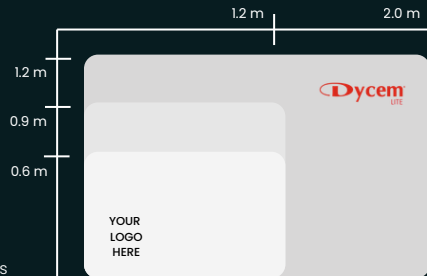

TECHNICAL SPECIFICATIONS

SIZE	Widths: 0.9 m / 1.2 m / 1.8 m Lengths: 1.2 m / 2.0 m	CLEANING	Controlled manual clean. Cleaned according to facility specifications and Dycem SOP's.
WEIGHT	Nominal 1.27 kg/cm ²	TOXICITY	Non-toxic, silicon, latex and melamine-free, no known adverse skin reactions
SURFACE RESISTIVITY	10 ⁸ ohms (tested to ASTM F150, DIN 51953, BS 2050)	OFFGASSING	Requirements met for ISO 16000-3, ISO 16000-6, ISO 16000-9 and ISO 16000-11
LOAD RESISTANCE	Pedestrian traffic (70 kg/cm ²)	UV & HEAT RESISTANCE:	Working range 0-50° C. Constant exposure to light will degrade surface.
CO-EFFICIENT OF FRICTION	≥ 0.30 in accordance with EN 13893 - Technical class DS		
FLAMMABILITY	EN 14041:2004		

Protecting Uptime. **Protecting what matters.**

dycemdatacenters.com



Get in Touch